



Scies à ruban - Bomar - Proline 520.450 H - MACH-ID 7207



Scies à ruban - Bomar - Proline 520.450 H

MACH-ID 7207

Marque Bomar
Taper Proline 520.450 H
Année 2016



Caractéristiques

Cutting speed Vario	20 - 120 M/Min
Circle blade size	6020 x 41 x 1,3 mm inch
Puissance moteur	4 kW
Cutting 90°	450
Cutting flat 90°	520 x 450 inch
Min. cutting length	20 inch

Dimensions

Longueur	85.512 inch
Largeur	47.126 inch
Hauteur	70.866 inch
Poids	2205.6 lbs

Important : les informations sur cette page ont été obtenues au meilleur de nos connaissances auprès des fabricants. L'exactitude n'est pas garantie mais les informations sont données de bonne foi. En conséquence, cela ne constitue pas une représentation ou des conditions contractuelles. Nous vous recommandons de vérifier tous les détails essentiels !



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com


E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal





Scies à ruban - Bomar - Proline 520.450 H - MACH-ID 7207

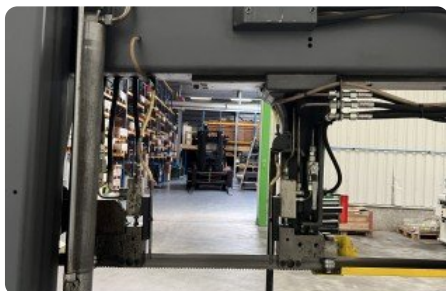

This **semiautomatic bandsaw** of a double-column construction, designed for perpendicular cuts of materials up to 450 mm in diameter, provides high quality and performance at an affordable price. The saw arm is guided by two robust columns and laid on preloaded, no-clearance linear guiding on one side and on auxiliary guiding on the other side. The excellent cutting performance results from these features: a three-sided hardmetal precision guide of the 34 mm high saw band and synchronous running brush for chips removal. Material clamping is performed by a full-stroke sectional vice. The material feed is manual. The cut material outlet is fitted with a slide.

The saw band drive is equipped with a frequency converter that allows the band's optimal speed to be set against the processed material within the 20-120 m/min range; this significantly increases both the saw band lifetime and the machine productivity. The band is tilted against the vice load surface at 2° angle, which significantly reduces cutting times and contributes to a longer saw band lifetime. Thanks to their arms rigidity, double-column bandsaws with a fixed arm position achieve much shorter cutting times (especially in cutting full materials) than machines with articulated saw arms.

Key features

- Both-sided linear guiding of the saw arm
- Arm laid on linear guiding
- Automatic downfeed pressure regulation
- Simple and clearly arranged control

Important : les informations sur cette page ont été obtenues au meilleur de nos connaissances auprès des fabricants. L'exactitude n'est pas garantie mais les informations sont données de bonne foi. En conséquence, cela ne constitue pas une représentation ou des conditions contractuelles. Nous vous recommandons de vérifier tous les détails essentiels !



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com

E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal

