

EDM-maskiner - MITSUBISHI - FA10S - MACH-ID 7755



EDM-maskiner - MITSUBISHI - FA10S

MACH-ID 7755

Fabrikat MITSUBISHI

Type FA10S

YOP 2012

Styring Mitsubishi





Specifikationer

X-akse	350 mm
Y-akse	250 mm
Z-Aksen	220 mm
Bordstørrelse L x B / eller ø	590 x 514 mm

Dimensioner

Længde	2072 mm
Bredde	2460 mm
Højde	2030 mm
Vægt	2000 kg

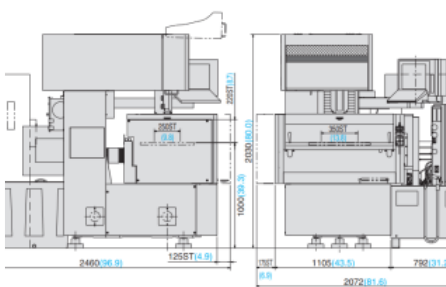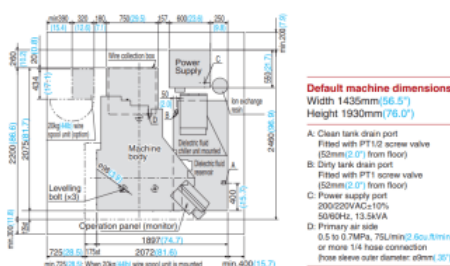

Bemærk venligst: Oplysningerne på denne side er indhentet efter bedste evne og overbevisning, og fra producenterne, hvor det er muligt. Det er givet i god tro, men dets nøjagtighed kan ikke garanteres. Det vil derfor ikke udgøre en repræsentation eller udgøre kontraktlige vilkår. Vi råder dig til at tjekke alle vitale detaljer!



Transito 21
 6909 DA Babberich
 51.9066195, 6.14990950


E: info@mach4metal.com
 E: sales@mach4metal.com
 E: buy@mach4metal.com

T: +31 (0)316 247 123
 F: +31 (0)316 247 123
 W: www.mach4metal.com

f www.facebook.com/Mach4Metal/
 t twitter.com/mach4metal



EDM-maskiner - MITSUBISHI - FA10S - MACH-ID 7755



Default machine dimensions
 Width 1435mm (56.5")
 Height 1930mm (76.0")

A: Clean tank drain port
 Fitted with PT1/2 screw valve
 (50mm/2.0" from floor)

B: Dirty tank drain port
 Fitted with PT1 screw valve
 (50mm/2.0" from floor)

C: Power supply port
 200020VAC±10%
 50/60Hz, 13.5kVA

D: Primary air side
 0.5 to 0.7MPa, 75L/min/2.0cu.ft/min
 or more 1/4 hose connection
 (hose sleeve outer diameter: 40mm/1.6")

Machine specifications (standard specifications)

Machine unit	Model	FA10S ADVANCE
Maximum workpiece dimensions (WxDxH)	(mm) [in]	800 (31.5) x 500 (20) x 215 (8.5)
Maximum workpiece weight	(kg) [lb]	500 (1100)
Table dimensions	(mm) [in]	500 (23.2) x 14 (20.2)
Machining travel (X/Y/Z)	(mm) [in]	350 (13.8) x 250 (9.8) x 220 (8.7)
Machining travel (U/V)	(mm) [in]	±32 (1.3) x ±32 (1.3)
Max. taper angle	(°)	15 (with 100mm/3.9" workpiece thickness)
Wire diameter	(mm) [in]	0.1 (0.04) to 0.3 (0.12) *
Weight	(kg) [lb]	2000 (4400)
Dielectric fluid reservoir	Tank capacity	(L) [US gal]
	440 (116)	
	Filtration method	Paper filter (two)
	Filtered particle size	(µm)
	3	
	Water purifier (ion exchange resin)	(L) [cu. ft.]
	100 (3)	
	Dielectric fluid chiller unit	Unit cooler
	Weight (when dry)	(kg) [lb]
	280 (617)	
General input	3-phase 200/220 AC ±10% 50/60Hz power factor 0.9	(kVA)
	13.5	
Required air rate	Required air rate	(Mpa) [psi]
	0.5 to 0.7 (70 to 100)	
Fluid rate	(L) [cu. ft.] / min	75 (2.6) or more

*1 ø0.2 (0.008") D.D guides come as standard. (ø0.25 (0.010") D.D guides come as standard for the USA and European markets)



- Max. tråd konusvinkel 15 Gr
- Tråddiameter 0,1 - 0,3 mm
- Bearbejdning U x V 32 x 32



Bemærk venligst: Oplysningerne på denne side er indhentet efter bedste evne og overbevisning, og fra producenterne, hvor det er muligt. Det er givet i god tro, men dets nøjagtighed kan ikke garanteres. Det vil derfor ikke udgøre en repræsentation eller udgøre kontraktlige vilkår. Vi råder dig til at tjekke alle vitale detaljer!



Transito 21
 6909 DA Babberich
 51.9066195, 6.14990950

E: info@mach4metal.com
 E: sales@mach4metal.com
 E: buy@mach4metal.com

T: +31 (0)316 247 123
 F: +31 (0)316 247 123
 W: www.mach4metal.com

f www.facebook.com/Mach4Metal/
 t twitter.com/mach4metal

