


EDM Erodeermachines - MITSUBISHI - FA10S - MACH-ID 7755

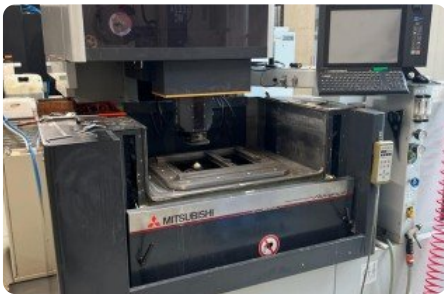

EDM Erodeermachines - MITSUBISHI - FA10S



MACH-ID 7755

Merk MITSUBISHI

Type FA10S

Bouwjaar 2012

Besturing Mitsubishi

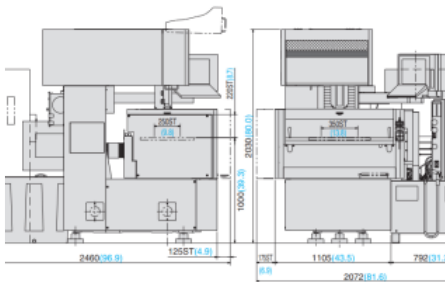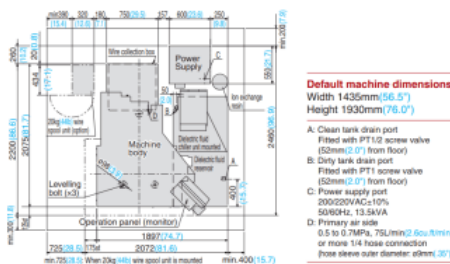

Specificaties

X-as bereik	350 inch
Y-as bereik	250 inch
Z-as bereik	220 inch
Tafel afmeting lengte x breedte / of ø	590 x 514 inch

Afmetingen

Lengte	81.575 inch
Breedte	96.85 inch
Hoogte	79.921 inch
Gewicht	4411.2 lbs

Belangrijk: De informatie op deze pagina is naar beste vermogen en overtuiging verkregen en waar nodig verkregen van de fabrikanten. De nauwkeurigheid kan niet worden gegarandeerd maar de informatie wordt te goeder trouw gegeven. Dienovereenkomstig vormt het geen vertegenwoordiging of contractuele voorwaarden. We raden u aan om alle essentiële details te controleren!



Transito 21
 6909 DA Babberich
 51.9066195, 6.14990950

E: info@mach4metal.com
 E: sales@mach4metal.com
 E: buy@mach4metal.com


T: +31 (0)316 247 123
 F: +31 (0)316 247 123
 W: www.mach4metal.com

f www.facebook.com/Mach4Metal/
 t twitter.com/mach4metal





EDM Erodeermachines - MITSUBISHI - FA10S - MACH-ID 7755



Default machine dimensions

Width 1435mm(56.5")
Height 1930mm(76.0")

- A: Clean tank drain port
Fitted with PT1/2 screw valve
(50mm(2.0") from floor)
- B: Dirty tank drain port
Fitted with PT1 screw valve
(50mm(2.0") from floor)
- C: Power supply port
200020VAC±10%
50/60Hz, 13.5kVA
- D: Primary air side
0.5 to 0.7MPa, 75L/min(2.0cu.ft/min)
or more 1/4 hose connection
(hose sleeve outer diameter: ø16mm(.63"))

Machine specifications (standard specifications)

Machine unit	Model	FA10S ADVANCE
Maximum workpiece dimensions (WxDxH) (mm)(in)		800(31.5)x500(20.1)x215(8.5)
Maximum workpiece weight (kg)(lb)		500(1100)
Table dimensions (mm)(in)		500(23.2)x1420(2)
Machining travel (X/Y/Z) (mm)(in)		350(13.8)x250(9.8)x220(8.7)
Machining travel (U/V) (mm)(in)		±32(1.3)x±32(1.3)
Max. taper angle (°)		15 (with 100mm(3.9") workpiece thickness)
Wire diameter (mm)(in)		0.1(0.004) to 0.3(0.012) *
Weight (kg)(lb)		2000(4400)
Dielectric fluid reservoir		
Tank capacity (L)(US gal)		440(116)
Filtration method		Paper filter (two)
Filtered particle size (µm)		3
Water purifier (ion exchange resin) (L)(cu.ft.)		100(3.5)
Dielectric fluid chiller unit		Unit cooler
Weight (when dry) (kg)(lb)		280(617)
General input		
3-phase 200/220 AC ±10% 50/60Hz power factor 0.9		13.5
Required air rate (Mpa)(in)		0.5 to 0.7(70 to 100)
Fluid rate (L)(cu.ft./min)		75(2.6) or more

*1 ø0.2 (0.008") D.D guides come as standard. (ø0.25 (0.010") D.D guides come as standard for the USA and European market)



- Max. wire taper Angle 15 Gr
- Wire diameter 0,1 - 0,3 mm
- Maching U x V 32 x 32



Belangrijk: De informatie op deze pagina is naar beste vermogen en overtuiging verkregen en waar nodig verkregen van de fabrikanten. De nauwkeurigheid kan niet worden gegarandeerd maar de informatie wordt te goeder trouw gegeven. Dienovereenkomstig vormt het geen vertegenwoordiging of contractuele voorwaarden. We raden u aan om alle essentiële details te controleren!



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal

