



Machines de soudage - Kjellberg - GTH802 / KA / KAS2015 - MACH-ID 8515



Machines de soudage - Kjellberg - GTH802 / KA / KAS2015

MACH-ID 8515

Marque Kjellberg

Taper GTH802 / KA / KAS2015

Année 2015

Contrôle Kjellberg KAS



Caractéristiques

Rated power 60 %	800
------------------	-----

Rater power 100 %	720
-------------------	-----

Input	63 A
-------	------

Dimensions

Longueur	38.583 inch
----------	-------------

Largeur	28.346 inch
---------	-------------

Hauteur	39.37 inch
---------	------------

Poids	705.8 lbs
-------	-----------

Important : les informations sur cette page ont été obtenues au meilleur de nos connaissances auprès des fabricants. L'exactitude n'est pas garantie mais les informations sont données de bonne foi. En conséquence, cela ne constitue pas une représentation ou des conditions contractuelles. Nous vous recommandons de vérifier tous les détails essentiels !



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com


E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal





Machines de soudage - Kjellberg - GTH802 / KA / KAS2015 - MACH-ID 8515

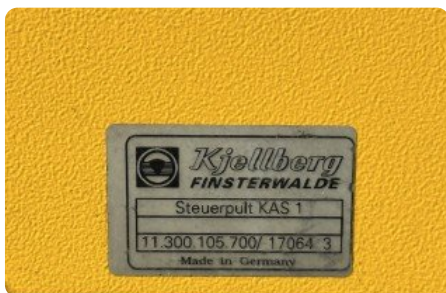

GTH 802; The welding rectifier (thyristor-controlled) with constant voltage characteristics up to 800A is especially suited for submerged-arc welding. Mechanised, semi-automated and automated welding processes in combination with the pre-adjustment of nominal values on the welding automats of the KA series (also with optional interface for external control) are available for the toughest use in tank facility and boiler construction, bridge construction, shipbuilding and industrial mounting. All Kjellberg power sources are characterised by a reliable ignition behaviour and a stable arc. Big analogue displays make it easier to monitor the entire welding process.

The mobile and self-driven Kjellberg automat KA 1-UP can be used for single wire welding of plane sheets and inner tubes. The submerged-arc welding automat is available in three versions: for a maximum wire diameter of 3 mm respectively 5 mm. Pipe inside welding is possible with a diameter of 1500 mm or more. The KA 1-UP automats can be easily and flexibly adapted to any welding task. Nominal values for welding current, arc voltage and welding speed can be pre-selected in coordination with the power source. The integrated automatic ignition and automatic burn-free functions guarantee an optimum welding process. Start-up phase and end crater filling phase are separately adjustable. Equipped with laser pointers and infinitely configurable distance rolls for profiles, webs and flanges, the KA 1-UP automats offer professional conditions for precise seam tracking and a high degree of automation. The encoder-driven carriage with all-wheel drive can be operated with three different track widths. Track wheels are an optionally available extra for all carriages. They guarantee a constant distance to the workpiece.

Important : les informations sur cette page ont été obtenues au meilleur de nos connaissances auprès des fabricants. L'exactitude n'est pas garantie mais les informations sont données de bonne foi. En conséquence, cela ne constitue pas une représentation ou des conditions contractuelles. Nous vous recommandons de vérifier tous les détails essentiels !



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com

E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal

