

Lasapparaten - Kjellberg - GTH802 / KA / KAS2015 - MACH-ID 8515



Lasapparaten - Kjellberg - GTH802 / KA / KAS2015

MACH-ID 8515

Merk Kjellberg
 Type GTH802 / KA / KAS2015
 Bouwjaar 2015
 Besturing Kjellberg KAS



Specificaties

Vermogen op 60 %	800
Vermogen op 100 %	720
Input	63 A

Afmetingen

Lengte	38.583 inch
Breedte	28.346 inch
Hoogte	39.37 inch
Gewicht	705.8 lbs

Belangrijk: De informatie op deze pagina is naar beste vermogen en overtuiging verkregen en waar nodig verkregen van de fabrikanten. De nauwkeurigheid kan niet worden gegarandeerd maar de informatie wordt te goeder trouw gegeven. Dienovereenkomstig vormt het geen vertegenwoordiging of contractuele voorwaarden. We raden u aan om alle essentiële details te controleren!



Transito 21
 6909 DA Babberich
 51.9066195, 6.14990950

T: +31 (0)316 247 123
 F: +31 (0)316 247 123
 W: www.mach4metal.com


E: info@mach4metal.com
 E: sales@mach4metal.com
 E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
 t twitter.com/mach4metal





Lasapparaten - Kjellberg - GTH802 / KA / KAS2015 - MACH-ID 8515

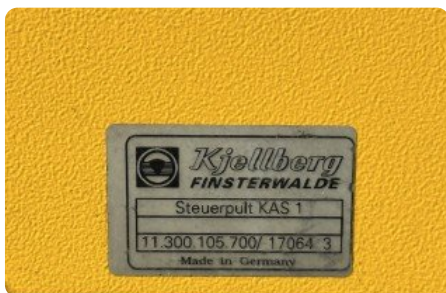

GTH 802; The welding rectifier (thyristor-controlled) with constant voltage characteristics up to 800A is especially suited for submerged-arc welding. Mechanised, semi-automated and automated welding processes in combination with the pre-adjustment of nominal values on the welding automats of the KA series (also with optional interface for external control) are available for the toughest use in tank facility and boiler construction, bridge construction, shipbuilding and industrial mounting. All Kjellberg power sources are characterised by a reliable ignition behaviour and a stable arc. Big analogue displays make it easier to monitor the entire welding process.

The mobile and self-driven Kjellberg automat KA 1-UP can be used for single wire welding of plane sheets and inner tubes. The submerged-arc welding automat is available in three versions: for a maximum wire diameter of 3 mm respectively 5 mm. Pipe inside welding is possible with a diameter of 1500 mm or more. The KA 1-UP automats can be easily and flexibly adapted to any welding task. Nominal values for welding current, arc voltage and welding speed can be pre-selected in coordination with the power source. The integrated automatic ignition and automatic burn-free functions guarantee an optimum welding process. Start-up phase and end crater filling phase are separately adjustable. Equipped with laser pointers and infinitely configurable distance rolls for profiles, webs and flanges, the KA 1-UP automats offer professional conditions for precise seam tracking and a high degree of automation. The encoder-driven carriage with all-wheel drive can be operated with three different track widths. Track wheels are an optionally available extra for all carriages. They guarantee a constant distance to the workpiece.

Belangrijk: De informatie op deze pagina is naar beste vermogen en overtuiging verkregen en waar nodig verkregen van de fabrikanten. De nauwkeurigheid kan niet worden gegarandeerd maar de informatie wordt te goeder trouw gegeven. Dienovereenkomstig vormt het geen vertegenwoordiging of contractuele voorwaarden. We raden u aan om alle essentiële details te controleren!



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com

E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal

