




## Welding manipulators - PEMAMEK - APS 25000 - MACH-ID 9218



### Welding manipulators - PEMAMEK - APS 25000

**MACH-ID 9218**

Make PEMAMEK  
Type APS 25000  
Year 2011

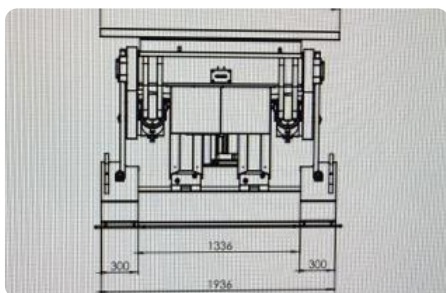

### Dimensions

Length 157.48 inch

Width 76.772 inch

Height 62.992 inch

Weight 24261.8 lbs

Please Note: The information on this page has been obtained to the best of our ability and belief, and from the manufacturers where possible. It is given in good faith, but its accuracy can not be guaranteed. Accordingly, it will not form a representation or constitute contractual terms. We advise you to check any vital details!



Transito 21  
6909 DA Babberich  
51.9066195, 6.14990950

T: +31 (0)316 247 123  
F: +31 (0)316 247 123  
W: [www.mach4metal.com](http://www.mach4metal.com)



E: [info@mach4metal.com](mailto:info@mach4metal.com)  
E: [sales@mach4metal.com](mailto:sales@mach4metal.com)  
E: [buy@mach4metal.com](mailto:buy@mach4metal.com)

f [www.facebook.com/Mach4Metal/](https://www.facebook.com/Mach4Metal/)  
t [twitter.com/mach4metal](https://twitter.com/mach4metal)





## Welding manipulators - PEMAMEK - APS 25000 - MACH-ID 9218

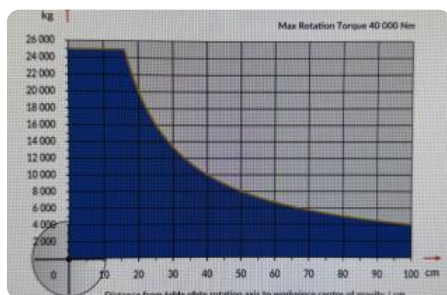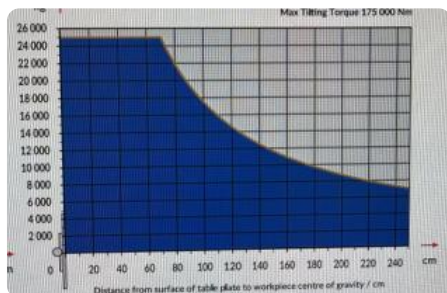

|                                        |                 |
|----------------------------------------|-----------------|
| Max. load (N)                          | 250 000         |
| Rotation speed (rpm)                   | 0,02-0,4        |
| Max. rotational torque (Nm)            | 40 000          |
| Tilting torque (Nm)                    | 175 000         |
| Tilting / angle (°)                    | hydr / 120      |
| Tilting time 0-max angle (s)           | 130             |
| Table plate diameter (mm)              | 1950            |
| T-slots on table plate                 | 8x M24 DIN508   |
| Integrated grounding, max. current (A) | 2100            |
| Height mini-max (mm)                   | 1600-2860       |
| Width (mm)                             | 1950            |
| Length (mm)                            | 4000            |
| Weight (kg)                            | 11 000          |
| Main supply cable length (m)           | 12              |
| Main supply connection 50 Hz           | 3x600VAC+(N)+PE |
| Power (A)                              | 32              |

- 3 Axis Hydraulic Positioner
- Remote control for RC32H-remote
- Rotation speed 0,02 - 0,4 Rpm
- Tilting torque 175000 Nm
- Rotation torq 40000 Nm
- Height minimum 1600 mm
- Height maximum 2860 mm
- Tilting 0-130 Grad
- Digital RPM Display



Please Note: The information on this page has been obtained to the best of our ability and belief, and from the manufacturers where possible. It is given in good faith, but its accuracy can not be guaranteed. Accordingly, it will not form a representation or constitute contractual terms. We advise you to check any vital details!



Transito 21  
6909 DA Babberich  
51.9066195, 6.14990950

E: [info@mach4metal.com](mailto:info@mach4metal.com)  
E: [sales@mach4metal.com](mailto:sales@mach4metal.com)  
E: [buy@mach4metal.com](mailto:buy@mach4metal.com)

T: +31 (0)316 247 123  
F: +31 (0)316 247 123  
W: [www.mach4metal.com](http://www.mach4metal.com)

f [www.facebook.com/Mach4Metal/](https://www.facebook.com/Mach4Metal/)  
t [twitter.com/mach4metal](https://twitter.com/mach4metal)

