


Press brake - TRUMPF - TrueBend 5085 - MACH-ID 9233



Press brake - TRUMPF - TrueBend 5085

MACH-ID 9233

Make TRUMPF
Type TrueBend 5085
Year 2007
Control TASC 6000

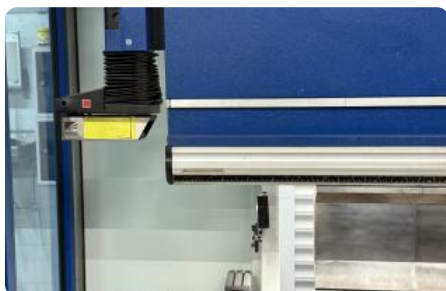

Specifications

Max. bending length	2210 mm
Max. pressing force	85 T
Troth beam	420 mm
Distance between column	1750 mm
Dis. Beam - Table	505 mm
Beam stroke	385 mm
Approch speed	220/S mm/min.
Working speed	25/S mm/min.
Return speed	220/S mm/min.

Dimensions

Length	3020 mm
Width	1800 mm
Height	2375 mm
Weight	7800 kg

Please Note: The information on this page has been obtained to the best of our ability and belief, and from the manufacturers where possible. It is given in good faith, but its accuracy can not be guaranteed. Accordingly, it will not form a representation or constitute contractual terms. We advise you to check any vital details!



Transito 21
 6909 DA Babberich
 51.9066195, 6.14990950

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com


E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal





Press brake - TRUMPF - TrueBend 5085 - MACH-ID 9233

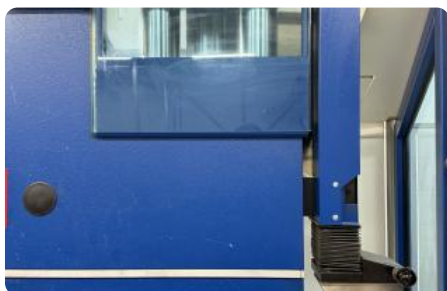

- 6 Axis back gauge X1/X2/R1/R2/Z1/Z2
- Wila Crowning
- Wila NEW STANDARD II Tool clamping
- 4 cylinder construction 2 left / 2 right
- Lazer safe protection
- Closed door back side machine
- 1e owner machine fully Trumpf serviced
- Run time hydarulic ram 2731 Hours / Hydraulic power on 21.644 Hours



Please Note: The information on this page has been obtained to the best of our ability and belief, and from the manufacturers where possible. It is given in good faith, but its accuracy can not be guaranteed. Accordingly, it will not form a representation or constitute contractual terms. We advise you to check any vital details!



Transito 21
6909 DA Babberich
51.9066195, 6.14990950

E: info@mach4metal.com
E: sales@mach4metal.com
E: buy@mach4metal.com

T: +31 (0)316 247 123
F: +31 (0)316 247 123
W: www.mach4metal.com

f www.facebook.com/Mach4Metal/
t twitter.com/mach4metal

